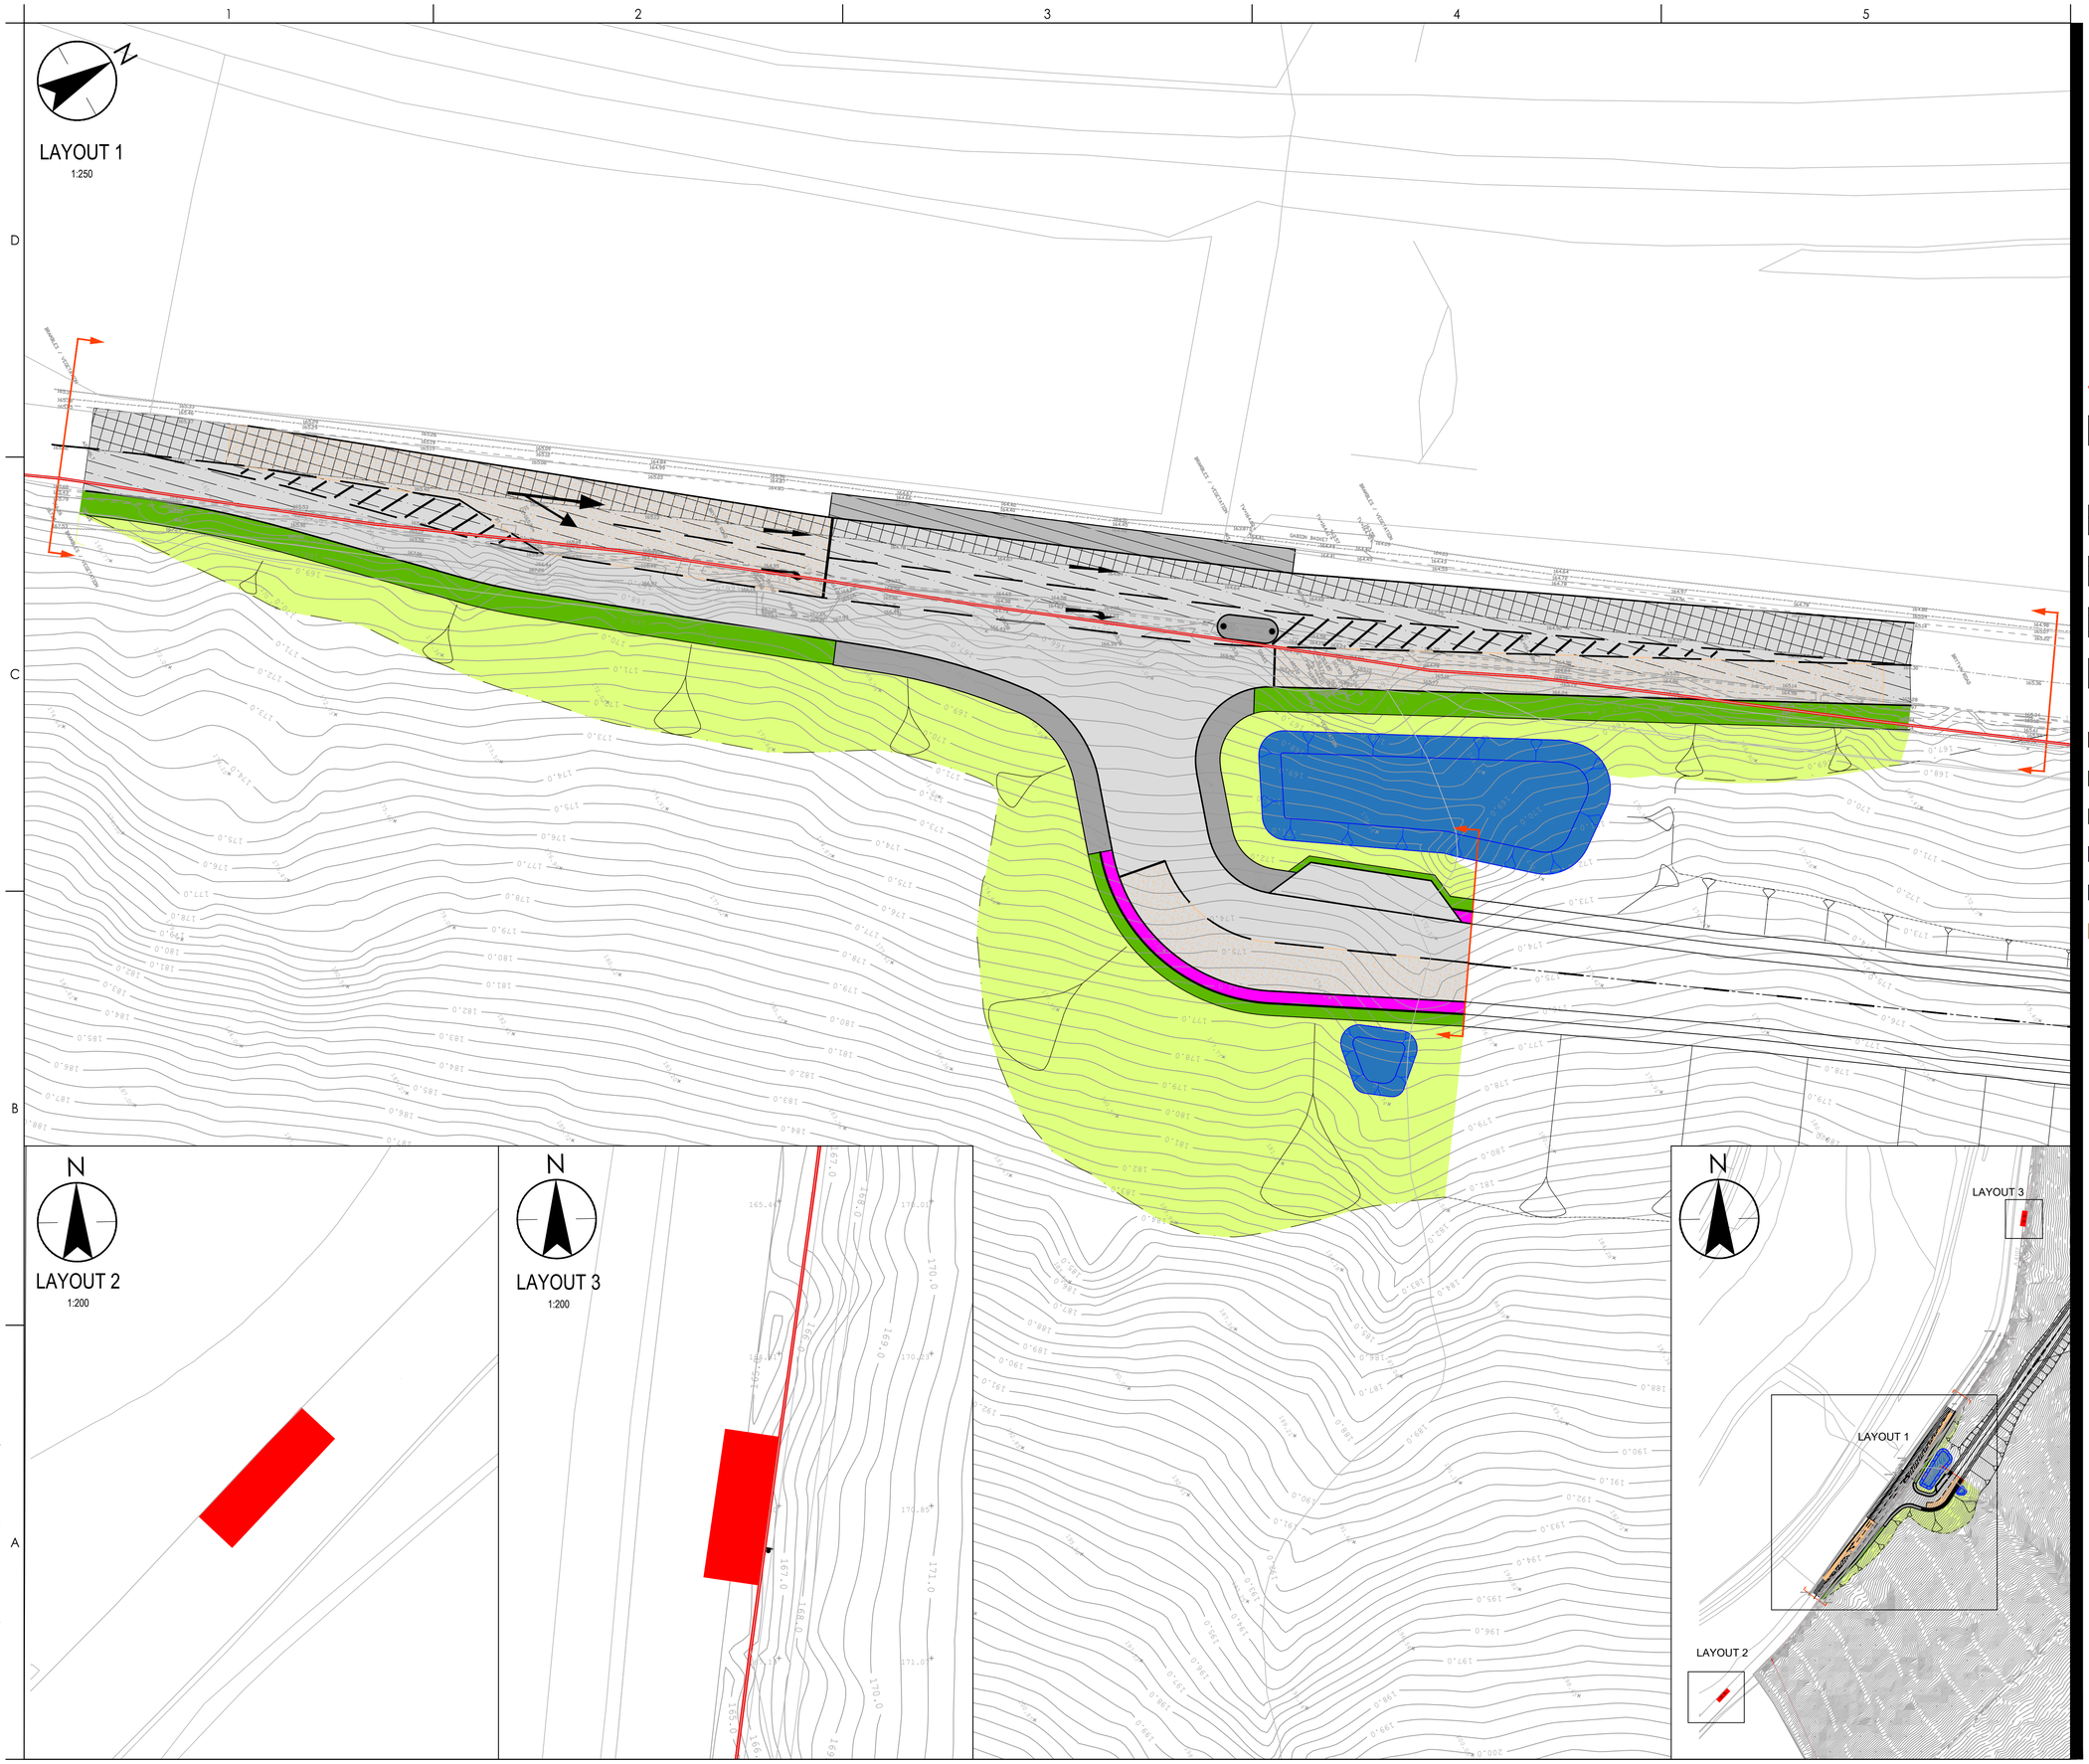

Stantec

Stantec UK Limited
BRISTOL
10 Queen Square, Bristol, BS1 4NT
Tel: +44 1173 327 840
www.stantec.com/uk

Copyright Reserved

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay.
The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden.

Notes

UTILITIES NOTE: The position of any existing public or private sewers, utility services, plant or apparatus shown on this drawing is believed to be correct, but no warranty to this is expressed or implied. Other such plant or apparatus may also be present but not shown. The Contractor is therefore advised to undertake their own investigation where the presence of any existing sewers, services, plant or apparatus may affect their operations.

KEY:

- SITE BOUNDARY
- FLEXIBLE CARRIAGEWAY CONSTRUCTION - FULL DEPTH
  45mm SURFACE COURSE
  65mm BINDER COURSE
  155mm BASE COURSE
  TYPE 1 GRANULAR SUB-BASE (REFER TO TABLE 1)
  CAPPING (REFER TO TABLE 1)
- FLEXIBLE CARRIAGEWAY CONSTRUCTION - INLAY
  AREA TO BE PLANED OFF AND RESURFACED
  45mm SURFACE COURSE
- FLEXIBLE CARRIAGEWAY CONSTRUCTION - OVERLAY
  45mm SURFACE COURSE
  VARIED REGULATING COURSE
- FOOTWAY CONSTRUCTION - OVERLAY
  20mm SURFACE COURSE
  VARIED REGULATING COURSE
- FOOTWAY / TRAFFIC ISLAND CONSTRUCTION - FULL DEPTH AS PER NPT STANDARD DETAIL
  20mm SURFACE COURSE
  50mm BASE COURSE
  100mm TYPE 1 GRANULAR SUB-BASE
- RED CARRIAGEWAY SURFACE FINISH
- SOFT VERGE
- PROPOSED EARTHWORKS
- PROPOSED HARDSTRIP
- BASIN
- PROPOSED ANTI SKID 50m FROM STOP LINE

Issued/Revision	By	Appd	YYYY.MM.DD
P02 FOR PLANNING	CH	RAS	2022.08.05
P01 FIRST ISSUE	CH	RAS	2022.06.10

	Dwn.	Dsgn.	Chkd.	YYYY.MM.DD
	CH	ET	LB	2022.06.10

Issue Status

FOR PLANNING

This document is suitable only for the purpose noted above.
Use of this document for any other purpose is not permitted.

Client/Project Logo

WILDFOX RESORTS

Client/Project

WILDFOX RESORTS

AFAN VALLEY

Title

WESTERN ACCESS

PAVEMENT CONSTRUCTION

Project No. 332310590

Scale AS SHOWN

Revision P02

Drawing No. AV-STN-HPV-WA-DR-CH-0701

Plotted: 24.08.2022 2022.08.24 4:54:08 PM By: Dowle, Ethan
ORIGINAL SHEET SIZE A1 \\ltn-fs-001\ltn\projects\332310590 - wildfox afan valley\civil\cad\plot 201\dwg\av-stn-hpv-wa-dr-ch-0701